


STAR III TANKS



Features

- Extra heavy 0.30" thick wall polyethylene with UV inhibitors
- Three (3) tank capacities to choose from: 7, 15, and 30 gallons (US)
- Molded-in threaded insets, raised shelf, and mounting bracket for sturdy pump mounting
- Ribs on bottom of tank for easy washdown
- Lid positions include open, closed and vent
- Includes inner tank foot valve and tubing, bulkhead fitting, weight
- Convenient, space-saving rectangular shape

Video link: 

Highlights

Tank Capacities

7 gal., 15 gal., 30 gal. (U.S)

Material

LDPE

Pump Compatibility

A1A, A1, M1, CD1,
MD1, A-100N

Max. Fluid Temperature

130 F (54 C)

Foot Valve / Strainer

PVDF Body/Filter

Warranty

1 Year

Included Items

Mounting Bracket	Suction Tubing	Bulkhead Fitting	Foot Valve / Weight	Lid
•	•	•	•	Open, Closed, Vent




Pump Compatibility	A1A, A1, M1, CD1, MD1, A-100NA, A-100NF, A-100NV*
Max. Fluid Temperature	130° F (54° C)
Max. Ambient Temperature	14 to 110° F/ -10 to 43° C
Tank Capacities	7 Gallon (26 Liters)
	15 Gallon (56 Liters)
	30 Gallon (113 Liters)
Approximate shipping wt	KIT-S07: 24 lb. (11 Kg), KIT-S15: 32 lb. (15 Kg), KIT-S30: 38 lb. (18 Kg)
Standards/Certifications	ISO 9001:2015

* Pumps ordered and shipped separately.

Materials of Construction

Tank:	Natural LDPE	Mounting Bracket:	PA12
3 Way Lid:	Polypropylene		Body/Insert/Filter: PVDF
Suction Tubing:	3/8" OD x 1/4" ID x 30" Clear PVC		Check Ball: Ceramic
Bulkhead Fitting:	PVC/EPDM	Foot Valve / Strainer:	Spring: Hastelloy C-276
Tube nuts:	PVDF		Ball Seat O-Ring: TFE/P
Hardware:	Stainless Steel		Static Seal O-Ring: FKM
		Weight:	Ceramic

Dimensions

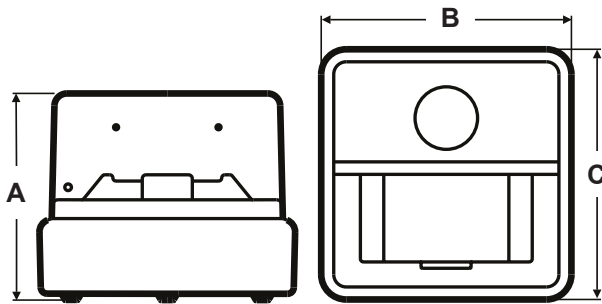

	7 Gallon Tank	15 Gallon Tank	30 Gallon Tank
PART	KIT-S07	KIT-S15	KIT-S30
A	12" (30cm)	17.25" (44cm)	27.50" (69cm)
B	18.5" (47cm)	20" (51cm)	20" (51cm)
C	18.5" (47cm)	20" (51cm)	20" (51cm)
SHIP WT	24 lb. (11kg)	32 lb. (15kg)	38 lb. (18kg)

